



Save These Instructions for Future Reference



Europa Pro Post Top - Buried 0° & 15° installation

ALL CONNECTIONS TO BE CARRIED OUT BY A QUALIFIED ELECTRICIAN
PLEASE READ CAREFULLY BEFORE STARTING INSTALLATION.



⚠ WARNING

Electronic Control Device

**ELECTRIC SHOCK
HAZARD**
This equipment is to be
serviced by trained
personnel only.

Europa Pro Post Top - Buried 0° & 15° installation

Save These Instructions for Future Reference

Electrical products can cause death, injury, or damage to property. Installation of this product must be carried out by a qualified electrician, in compliance with SANS 10142 or corresponding regulations of the country of installation. On completion of installation, the Certificate of Compliance must be updated.

WARNING: TO AVOID FIRE, SHOCK OR DEATH
TURN OFF POWER AT CIRCUIT BREAKER OR FUSE AND TEST THAT THE POWER IS OFF BEFORE WIRING

ALL LUMINAIRES SUPPLIED AND TO BE INSTALLED ABOVE AND BELOW 5 METERS ARE IN COMPLIANCE WITH SANS 60598 SECTION 3.5.6 ACCORDING TO THE MANUFACTURER GUARANTEE AND WARRANTY

Regent Lighting reserves the right to change specifications modify designs and discontinue items without incurring obligation and whilst every effort is made to ensure that descriptions, specifications and other information in this catalogue are correct, no warranty is given in respect thereof and the company shall not be liable for any error therein.

www.regentlight.co.za

REGENT LIGHTING A DIVISION OF WAHL
INDUSTRIES.

3 - 13 MAIN REEF SERVICE ROAD, CORNER
SPRINGBOK AND MAIN REEF ROAD, INDUSTRIAL,
JOHANNESBURG, SOUTH AFRICA.
TEL : +27 11 474 0171

December 2022

www.regentlight.co.za

INSTALLATION INSTRUCTIONS

PLEASE READ CAREFULLY BEFORE STARTING INSTALLATION.
ALL CONNECTIONS TO BE CARRIED OUT BY A QUALIFIED ELECTRICIAN




⚠ WARNING

Electronic Control Device

**ELECTRIC SHOCK
HAZARD**
This equipment is to be
serviced by trained
personnel only.

DO NOT CONNECT THE FITTING LIVE


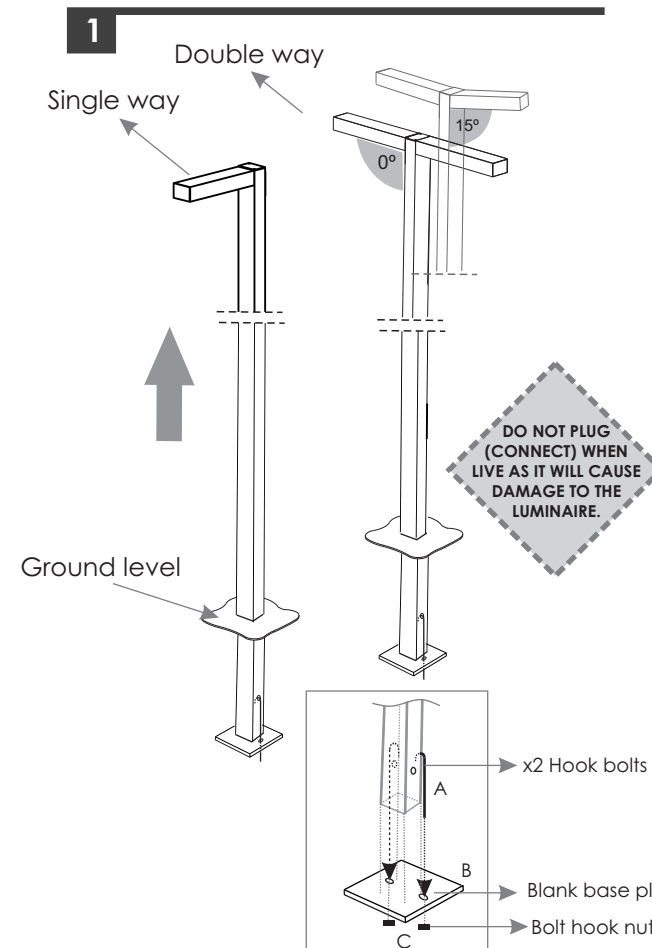


Requirements:

- Be sure the electricity to the system you are working on is isolated.
- **If the main supply power (live) is on, it will cause damage to the luminaire.**

1. Ensure the pole is installed correctly.

A. Ensure the electrical cable is fed through the hole.

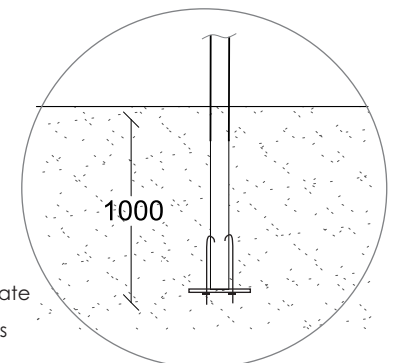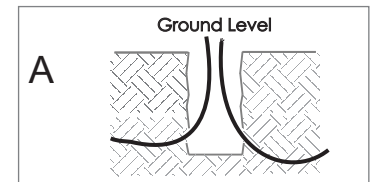

Assembly of buried base plate




Important Safety Instructions

- This product should be installed by a competent person i.e. Qualified electrician.
- This product requires a constant stable electrical supply 220V - 240V VAC 50Hz - alternating current.
- The product must be regularly maintained, including the replacement of lamps/LED timeously.
- This product could be HAZARDOUS if not used correctly, it could cause electric shock, serious bodily harm or death.
- This product is not a toy, please keep away from children.
- This product may contain small parts that can be swallowed.



- Use only the correct light bulbs/LED as stipulated on the carton for the product.
- Any modifications of this product after supply will result in the guarantee being void.
- Spare parts may become unavailable over time. Items can vary slightly from the picture on the carton
- Coastal humidity can affect the longevity of the light fitting over time.
- Be sure to follow the steps in the order given.
- Read instructions carefully.

2

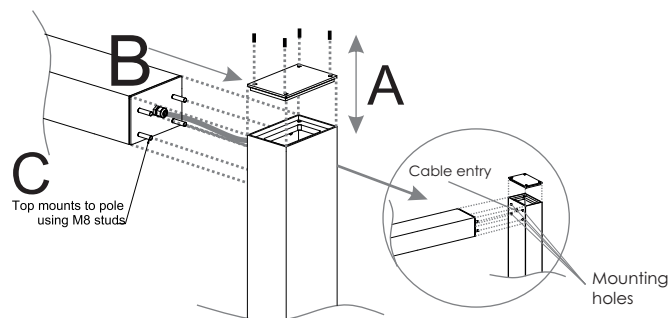


2. Recommended before installing (burying) the pole into the ground.

A. Remove the pole top cover.

B. Using the electrical tail supplied from the fitting, feed the cable through the locating hole on the top of the pole, down the pole to the access door.

C. Align and fasten the fitting to the pole through the locating holes either at 0° or at 15°. Once securely fastened, align and fasten the pole top cover.

3

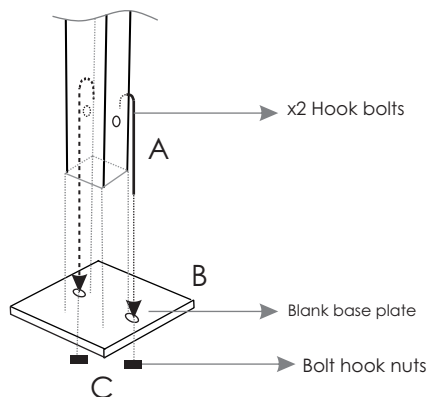


3. Assemble the base plate (supplied) to be buried in the ground, using the stainless steel hook bolts and nuts (supplied).

Hook the two hook bolts into the allocated holes on the pole. Slide the blank base plate onto the hook bolts at the bottom of the pole. Align and fasten the hook bolts using the nuts.

Ensure the electrical cable tail is fed through the pole and base plate.

4

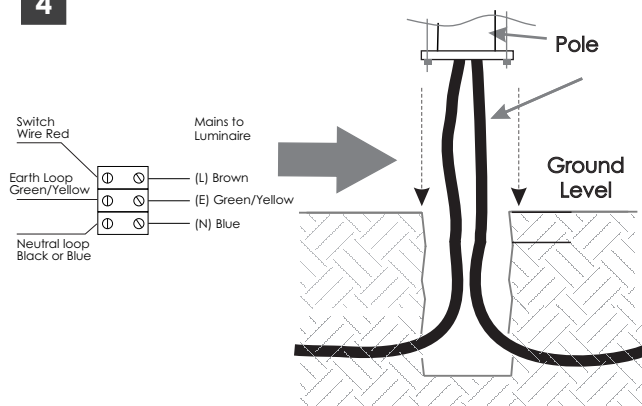


4. Remove the access door. Feed the cable from the ground through the glands at the bottom of the fitting to the access door.

Connect the Switched Live (S/A), Neutral (N) and Earth (E) cable(s) to the MCB and connector block in the access door.


SWITCHED LIVE – (Red or Brown) to terminal marked L
NEUTRAL – (Black or Blue) to terminal marked N
EARTH – (Green/Yellow) to terminal marked.

5

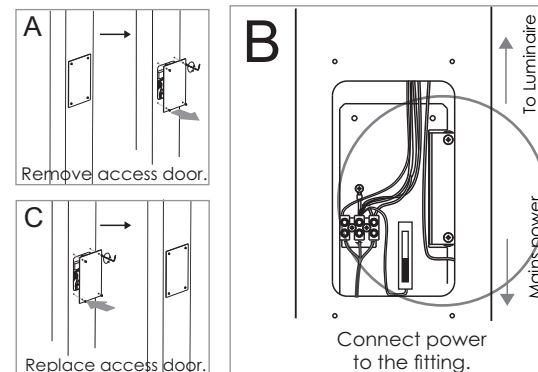


4. A. Remove the access door via the four stainless steel fasteners using an allen key.

B. Connect the cable from the fitting in the pole to the connector block through the access door.



C. Replace the access door via the four stainless steel fasteners using an allen key.

6

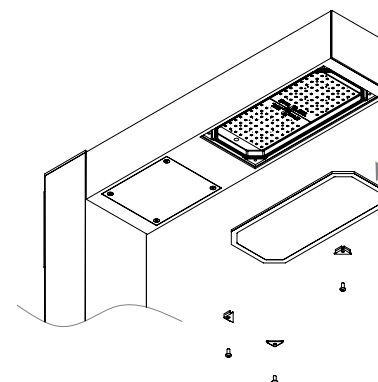


6. To install or change the LED, unscrew the four stainless steel screws on the glass and remove the glass from the fitting, and allow the glass to hinge on the securing cable.

Ensure the new LED is the correct wattage, according to the specification and is securely located on the mounting surface.

Replace the glass via the four stainless steel screws. Ensure there is no exposed conductors or loose strands.

Ensure that the gasket is securely in place.

7

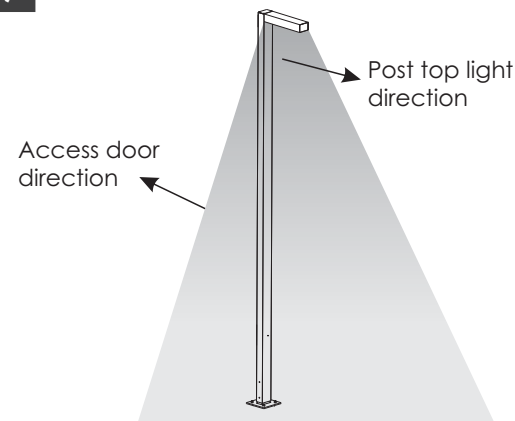

7. Switch on the power supply.