

ANDO

MODEL NUMBER

ANDO

SPECIFICATIONS

HOUSING: Aluminium.

LIGHT SOURCE: The fitting is designed to operate a 50W LED.

REFLECTOR: 98% efficiency.

DIFFUSER: PMMA.

MOUNTING: Suspended. Suggested 500mm off the ceiling.
Suspension fixing: soffit or ceiling "T".

Hanging detail: stainless steel wire and cabtyre.

COLOUR CONSISTENCY: Mac Adams 3 SDCM.

UGR: <17.

LM80 8000 hours: 97.9 (55° C).

SYSTEM EFFICIENCY: 98 lm/W.

CCT: 4000K

CRI: > 80.

DIMENSIONS: 1220mm x 168mm x 40mm.

APPLICATION: Suitable for indoor use only.

Ambient temperature - 25° C

Weight: 4.2 Kg.

FEATURES: Dimmable option available.




LIGHT SOURCE

LED


NOMINAL WATTAGE (W)	COLOUR TEMP (K)	NOMINAL FLUX (lm)
50W	4000K	4900 lm

APPLICATION AREAS

Indoor application.
General lighting applications requiring suspended mounting.
Office lighting.
Education.
Healthcare.



DIMENSIONS IN MM

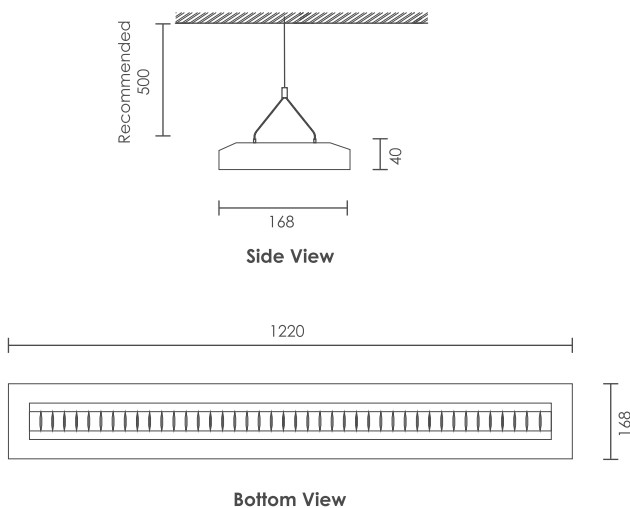


COLOURS

White (WH)

LIGHT DISTRIBUTION

LED 50W 4000K

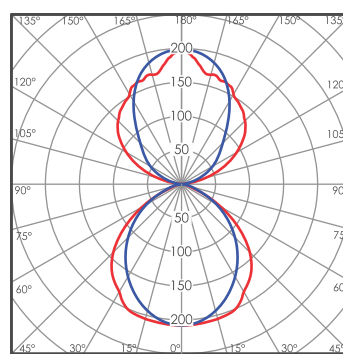

cd/klm
— C0 - C180 — C90 - C270

