

CANOLUX 85 PENDANT

MODEL NUMBER

CANOLUX 85 PENDANT

SPECIFICATIONS

HOUSING : Extruded aluminium.

LIGHT SOURCE : The fitting is designed to operate a 10W LED.

DIFFUSER : Clear.

REFLECTOR : Lensed - Beam 36° or 60°.

FINISH : Powder coated.

MOUNTING : Ceiling surface mounted.

COLOUR CONSISTENCY : Mac Adams 3 SDCM.

LUMEN MAINTENANCE : 90000h (L90B10) @ 65° C.

CCT : 4000K or 3000K.

CRI : 90.

DIMENSIONS : 85mm Ø x 80mm

APPLICATION : Suitable for indoor use only.

OPERATING TEMPERATURE : (T_a) - 20° C to +30° C.

FEATURES : Fitting supplied with internal power supply.
Phase cut dimmable.



LIGHT SOURCE

LED COB


SYSTEM WATTAGE (W)	COLOUR TEMP (K)	NOMINAL FLUX (lm)	LUMINOUS FLUX (lm) 36°	LUMINOUS FLUX (lm) 60°
10W	4000K	1450 lm	1063 lm	1114 lm
	3000K	1353 lm	1000 lm	1074 lm

APPLICATION AREAS


Indoor application.
Exclusive retail shops
Supermarkets.
Hotels.
Exhibition halls.
Studios.



DIMENSIONS IN MM

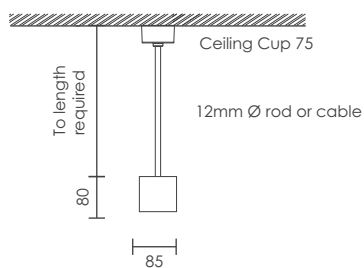

Side View



Side View

Bottom View

CEILING CUP 75x48

COLOURS


- Black (B)
- White (W)

BEAM DEGREE




LIGHT DISTRIBUTION

LED 10W 36°

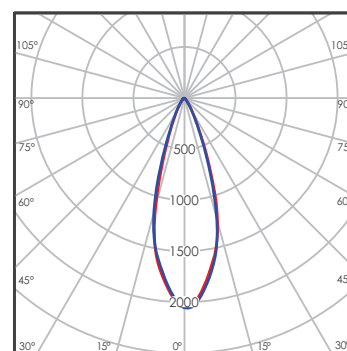

cd/km
C0 - C180 C90 - C270

LED 10W 60°

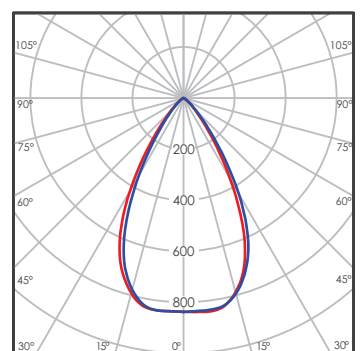

cd/km
C0 - C180 C90 - C270

