CANOLUX 85




CANOLUX 85

MODEL NUMBER

CANOLUX 85

SPECIFICATIONS

HOUSING : Extruded aluminium.
LIGHT SOURCE : The fitting is designed to operate a 10W LED.
DIFFUSER : Clear.
REFLECTOR : Lensed - Beam 36° or 60°.
FINISH : Powder coated.
MOUNTING : Ceiling surface mounted.
COLOUR CONSISTENCY : Mac Adams 3 SDCM.
LUMEN MAINTENANCE : 90000h (L90B10) @ 65° C.
CCT : 4000K or 3000K.
CRI : 90.
DIMENSIONS : 85mm Ø x 80mm
APPLICATION : Suitable for indoor use only.
OPERATING TEMPERATURE : (Ta) - 20° C to +30 ° C.
FEATURES : Fitting supplied with internal power supply.
Phase cut dimmable.

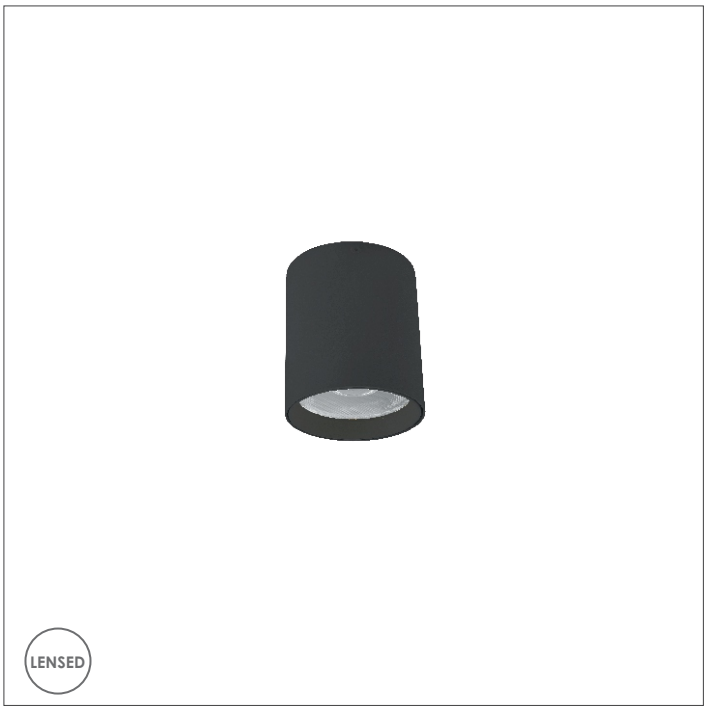

bluTECH daliTECH

APPLICATION AREAS

Indoor application.
Exclusive retail shops
Supermarkets.
Hotels.
Exhibition halls.
Studios.



COLOURS

Black (B)

White (W)

BEAM DEGREE

36° 60°

IP 20

LIGHT SOURCE

LED COB

SYSTEM WATTAGE (W)	COLOUR TEMP (K)	NOMINAL FLUX (lm)	LUMINOUS FLUX (lm) 36°	LUMINOUS FLUX (lm) 60°
10W	4000K	1450 lm	1063 lm	1114 lm
	3000K	1353 lm	1000 lm	1074 lm


EMERGENCY LIGHTING (OPTIONAL)

PACK 2 - REMOTE EMERGENCY 7W-20W


DURATION	BACK-UP LIGHT OUTPUT	BATTERY TYPE	INTEGRATION	SELF-TESTING	DIMENSIONS
3 HOURS	20%	Lithium-ion	Remote	Yes	200x42x30mm

LIGHT DISTRIBUTION


LED 10W 36°

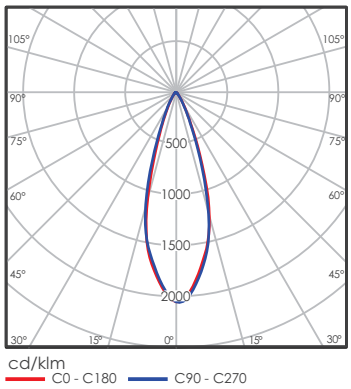

LED 10W 60°

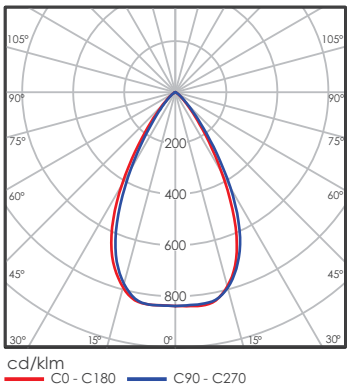

DIMENSIONS IN MM

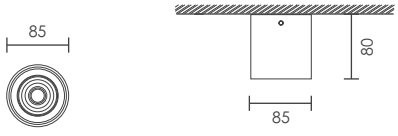

Bottom View **Side View**