

DOME

MODEL NUMBER

DOME

SPECIFICATIONS

HOUSING : Extruded aluminium and aluminium spinning.

LIGHT SOURCE : The fitting is designed to operate a 10W LED.

REFLECTOR : Lensed - Beam 36° or 60°.

FINISH : Powder coated.

MOUNTING : Ceiling surface mounted or track mounted.

COLOUR CONSISTENCY : Mac Adams 3 SDCM.

LUMEN MAINTENANCE : 90000h (L90B10) @ 65° C.

CCT : 4000K or 3000K.

CRI : 90.

DIMENSIONS : 420mm Ø x 200mm

APPLICATION : Suitable for indoor use only.

OPERATING TEMPERATURE : (Ta) - 20° C to +30° C.

FEATURES : Fitting supplied with internal power supply.
Phase cut dimmable.



APPLICATION AREAS

Indoor application.
Exclusive retail shops
Supermarkets.
Hotels.
Exhibition halls.
Studios.



COLOURS

 Black (B)

 White (W)

BEAM DEGREE




LIGHT SOURCE

LED COB

SYSTEM WATTAGE (W)	COLOUR TEMP (K)	NOMINAL FLUX (lm)	LUMINOUS FLUX (lm) 36°	LUMINOUS FLUX (lm) 60°
10W	4000K	1450 lm	1063 lm	1114 lm
	3000K	1353 lm	1000 lm	1074 lm


LIGHT DISTRIBUTION

LED 10W 36°

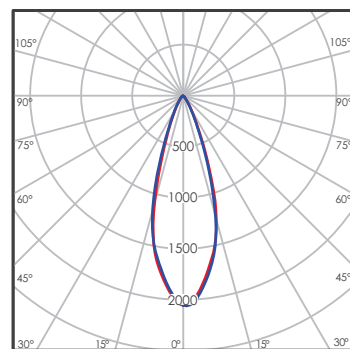

cd/klm
— C0 - C180 — C90 - C270

LED 10W 60°

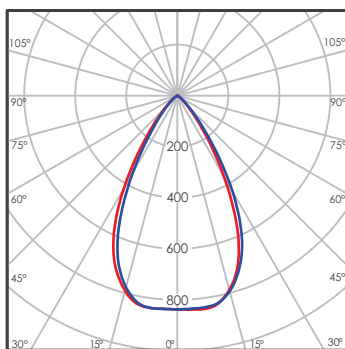

cd/klm
— C0 - C180 — C90 - C270

DIMENSIONS IN MM

