ENIGMA PULL OUT



ENIGMA PULL OUT

MODEL NUMBER

ENIGMA PULL OUT



SPECIFICATIONS


HOUSING : Die cast and extruded aluminium.
HEAT SINK : Aluminium extrusion, anodised black.
DIFFUSER : Clear .
FINISH : High pure powder coated.
LIGHT SOURCE : The fitting is designed to operate a 11W LED.
BEAM ANGLE : 36°.
MOUNTING : Ceiling mounted recessed. Adjustable.
COLOUR CONSISTENCY : Mac Adams 3 SDCM
SYSTEM EFFICIENCY : 102 lm/W
CCT : 2700K.
CRI : 90
SIZE : 90mm Ø x 142mm.
CUT-OUT : 80mm Ø.
UGR : Less than 5.
LUMEN MAINTENANCE : 60000h (L80B10) @ 65° C.
APPLICATION : Suitable for indoor use only.
OPERATING TEMPERATURE : (Ta) - 20° C to +30 ° C.
DIMMING : Phase cut.

COLOURS

☐ White (W)

APPLICATION AREAS

Indoor application.
Symmetrical distribution.
Hospitality
Luxury hotels
Resorts & lodges
Restaurants
Boutique stores




IP 20

LIGHT SOURCE

LED CURRENT (mA)	COLOUR TEMP (K)	SYSTEM WATTAGE (W)	CRI 90 LUMINOUS FLUX (lm)
300mA	2700K	11W	1254 lm

DIMENSIONS IN MM

80mm Ø

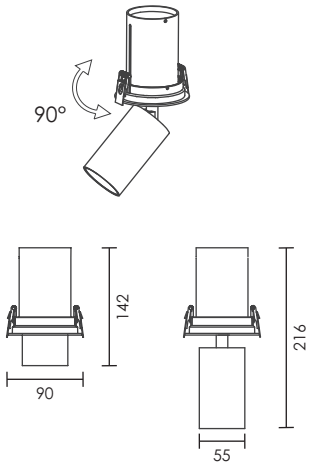

Side View










LIGHT DISTRIBUTION

36° Beam

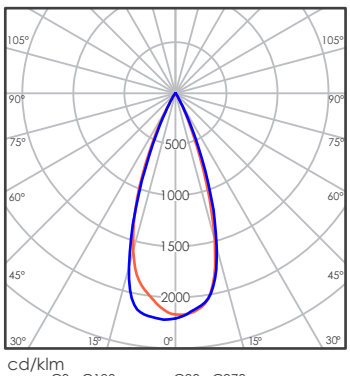

cd/klm

C0 - C180 C90 - C270

IP 20