



Save These Instructions for Future Reference



Kevo

ALL CONNECTIONS TO BE CARRIED OUT BY A QUALIFIED ELECTRICIAN
PLEASE READ CAREFULLY BEFORE STARTING INSTALLATION.



⚠ WARNING

Electronic/Magnetic Control Device

**ELECTRIC SHOCK
HAZARD**
This equipment is to be
serviced by trained
personnel only.

Electrical products can cause death, injury, or damage to property. Installation of this product must be carried out by a qualified electrician, in compliance with SANS 10142 or corresponding regulations of the country of installation. On completion of installation, the Certificate of Compliance must be updated.

– For non-user replaceable light sources:

"The light source contained in this luminaire shall only be replaced by the manufacturer or his/her service agent or a similar qualified person."

WARNING: TO AVOID FIRE, SHOCK OR DEATH

TURN OFF POWER AT CIRCUIT BREAKER OR FUSE AND TEST THAT THE POWER IS OFF BEFORE WIRING

ALL LUMINAIRES SUPPLIED AND TO BE INSTALLED ABOVE AND BELOW 5 METERS ARE IN COMPLIANCE WITH SANS 60598 SECTION 3.5.6 ACCORDING TO THE MANUFACTURER GUARANTEE AND WARRANTY

Regent Lighting reserves the right to change specifications modify designs and discontinue items without incurring obligation and whilst every effort is made to ensure that descriptions, specifications and other information in this catalogue are correct, no warranty is given in respect thereof and the company shall not be liable for any error therein.

www.regentlight.co.za

REGENT LIGHTING A DIVISION
OF WAHL INDUSTRIES.

3 - 13 MAIN REEF SERVICE ROAD, CORNER
SPRINGBOK AND MAIN REEF ROAD, INDUSTRIAL,
JOHANNESBURG. SOUTH AFRICA.
TEL : +27 11 474 0171

April 2020

INSTALLATION INSTRUCTIONS

PLEASE READ CAREFULLY BEFORE STARTING INSTALLATION.
ALL CONNECTIONS TO BE CARRIED OUT BY A QUALIFIED ELECTRICIAN




⚠ WARNING

Electronic/Magnetic Control Device

**ELECTRIC SHOCK
HAZARD**
This equipment is to be
serviced by trained
personnel only.

DO NOT CONNECT THE FITTING LIVE


1

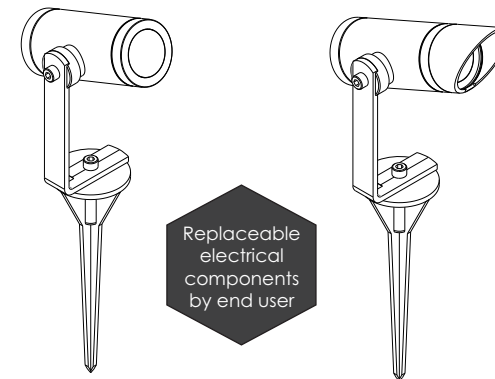

Requirements:

- Be sure the electricity to the system you are working on is isolated.

2

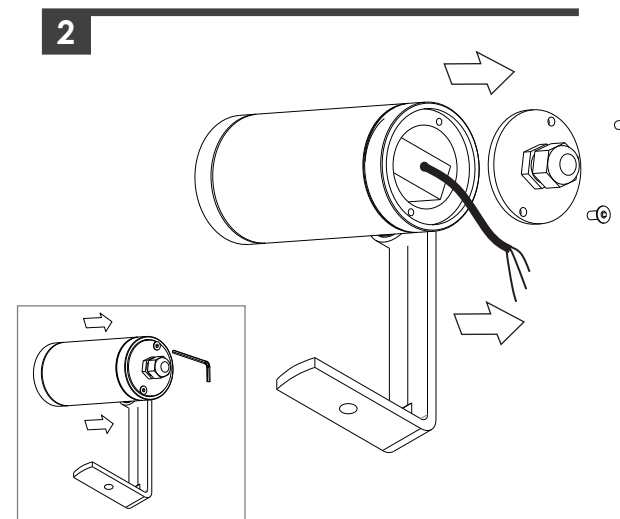

- Undo the two allen key fasteners that hold the base to the body of the fitting.
- Remove the body from the base (back plate).

**Please note that the amount
Wattage will vary depending
on the chosen Lamp/Cob
Chosen.**




Important Safety Instructions

- This product should be installed by a competent person i.e. Qualified electrician.
- This product requires a constant stable electrical supply 220V - 240V VAC 50Hz - alternating current.
- The product must be regularly maintained, including the replacement of lamps/LED timeously.
- This product could be HAZARDOUS if not used correctly, it could cause electric shock, serious bodily harm or death.
- This product is not a toy, please keep away from children.
- This product may contain small parts that can be swallowed.



- Use only the correct light bulbs/LED as stipulated on the carton for the product.
- Any modifications of this product after supply will result in the guarantee being void.
- Spare parts may become unavailable over time. Items can vary slightly from the picture on the carton
- Coastal humidity can affect the longevity of the light fitting over time.
- Be sure to follow the steps in the order given.
- Read instructions carefully.

3

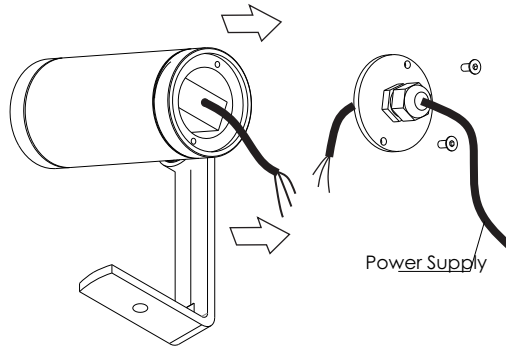


- Feed power supply through gland.

Requirements:

- Be sure the electricity to the system you are working on is isolated.


4



- Connect the Switched Live (S/A), Neutral (N) and Earth (E) cable(s) to the terminal block2. Unscrew lamp, through the cable glandanticlockwise in the back plate (still and pull out. detached from front face).


SWITCHED LIVE – (Red or Brown) to terminal marked L
NEUTRAL – (Black or Blue) to terminal marked N
EARTH – (Green/Yellow) to terminal marked.

5

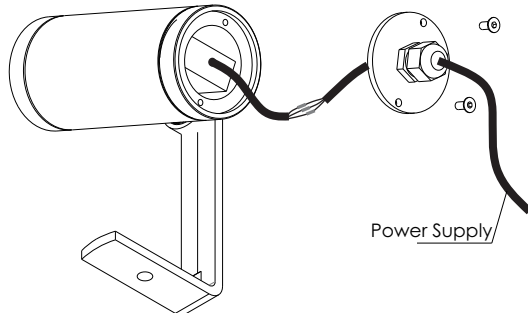


- Make connection and ensure it can sustain strain.

6

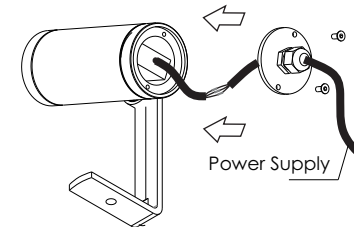


- Replace the main body of the luminaire to the mounted base.
- Apply pressures to the main body when assembling the two bodies.

7



- Use the two stainless steel allen key screws to fasten the main body to the base. By applying pressure and compressing the two bodies together the gasket is able to create a water tight seal.

8

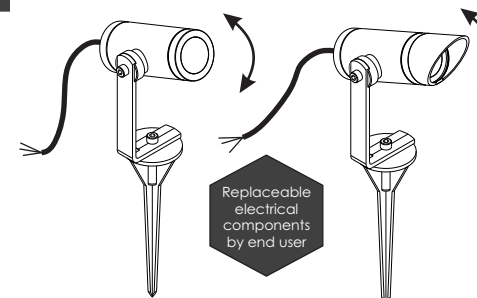


Replaceable electrical components by end user

- Adjust fitting accordingly
- Switch on the power supply.

9

MAINTENANCE

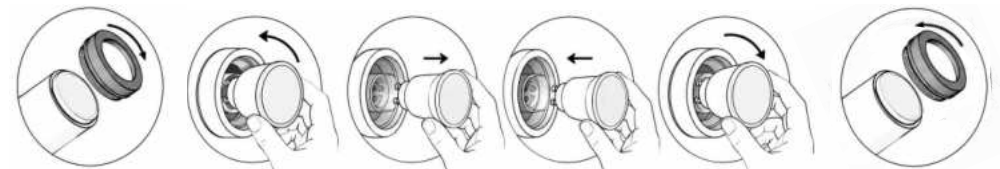

1. Unscrew kevo lid anticlockwise
2. Unscrew lamp anticlockwise
3. Pull out lamp
4. Replace with new lamp
5. Screw new lamp clockwise to secure
6. Carefully Screw back the lid to close fitting.