LILLI 26

MODEL NUMBER

LILLI 26

SPECIFICATIONS

HOUSING : Die cast and extruded aluminium.
LIGHT SOURCE : The fitting is designed to operate a 1.5W LED.
REFLECTOR : Black reflector. Beam 15° or 25°.
DIFFUSER : Clear .
FINISH : High pure powder coated.
MOUNTING : Ceiling mounted recessed.
COLOUR CONSISTENCY : Mac Adams 3 SDCM
LUMEN MAINTENANCE : 60000h (L80B10) @ 65° C.
SIZE : 30mm Ø x 24mm.
CUT-OUT : 26mm Ø.
CCT : 2700K.
CRI : >90.
APPLICATION : Suitable for indoor use only.
OPERATING TEMPERATURE : (Ta) - 20° C to +30 ° C.



LIGHT SOURCE

LED

SYSTEM WATTAGE (W)	COLOUR TEMP (K)	LUMINOUS FLUX 15° (lm)	LUMINOUS FLUX 25° (lm)
1.5W	2700K	60 lm	57 lm


APPLICATION AREAS

Indoor application.
Symmetrical distribution.
Hospitality
Luxury hotels
Resorts & lodges
Restaurants
Boutique stores




DIMENSIONS IN MM

26mm Ø.



Bottom View




Side View

COLOURS

White (W)


LIGHT DISTRIBUTION

15° Beam

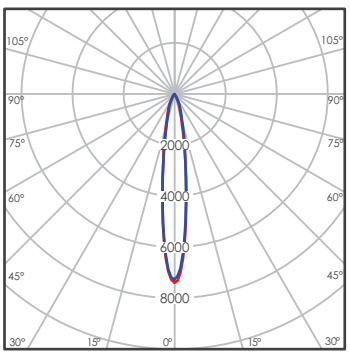

cd/klm
C0 - C180
C90 - C270

25° Beam

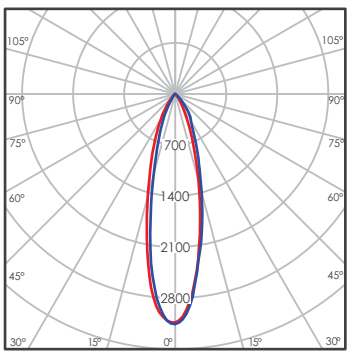

cd/klm
C0 - C180
C90 - C270

IP 20