

LINEAR A-TRACK

MODEL NUMBER

LINEAR A-TRACK

SPECIFICATIONS

HOUSING: Extruded aluminium.

LIGHT SOURCE : The fitting is designed to operate a LED up to 43W.

DIFFUSER: PMMA Matt LT87.

FINISH : Powder coated.

LUMEN MAINTENANCE: 50000h (L90B10).

CCT: 4000K or 3000K.

CRI: 80.


MOUNTING : Installation on three-phase track. Only to be installed outside arms reach. Adjustable.

DIMENSIONS : 851mm x 50mm x 70mm.

APPLICATION: Suitable for indoor use only.

OPERATING TEMPERATURE: (T_a) - 20° C to +30° C.

FEATURES : 355° adjustable on the horizontal plane & 45° adjustable on the vertical plane.

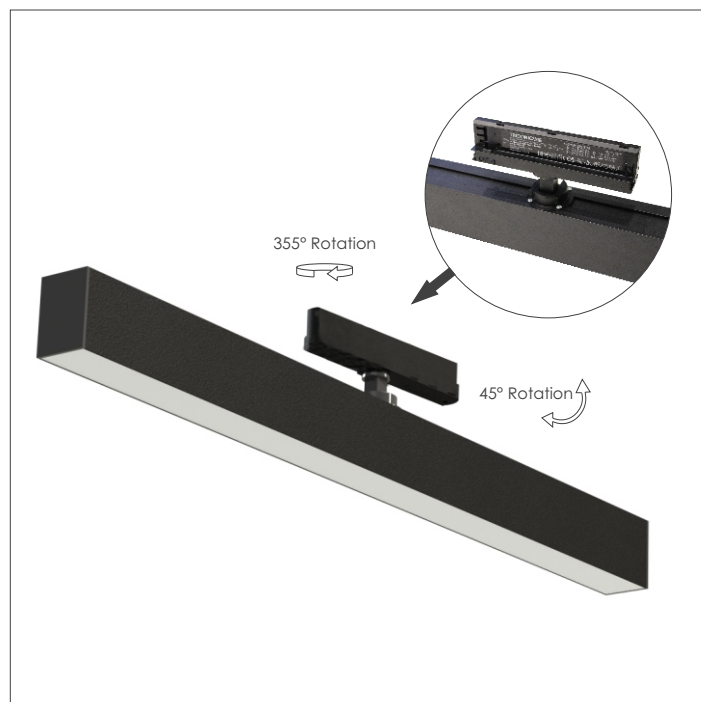


LIGHT SOURCE

LED - ZHAGA BOARD | CRI80 | 4000 Kelvin


LED CURRENT (mA)	SYSTEM WATTAGE (W)	NOMINAL FLUX (lm)
700mA	27W	4467 lm
900mA	34W	5621 lm
1050mA	43W	6849 lm

DIMENSIONS IN MM

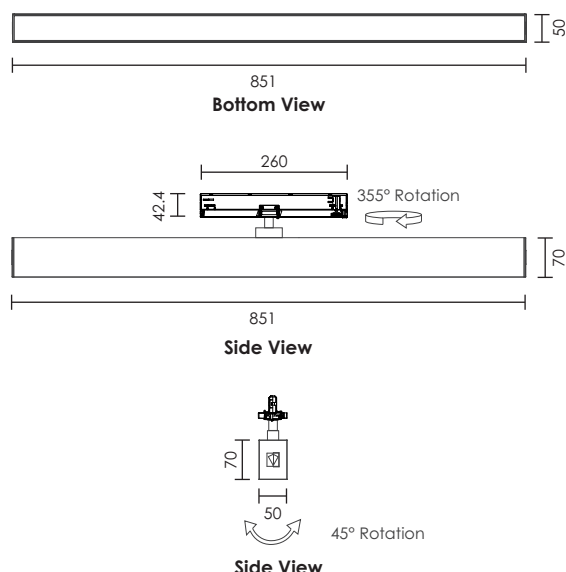

APPLICATION AREAS

Indoor application.
Exclusive retail shops
Supermarkets.
Hotels.
Exhibition halls.
Studios.



COLOURS



LIGHT DISTRIBUTION

LED 43W

