

LINEAR STRIP

MODEL NUMBER

LINEAR STRIP 8mm

SPECIFICATIONS

INPUT VOLTAGE: DC24V

CRI: 90

MAX. POWER: 18.48W(1m)

POWER RANGE: 15.1 - 18.5W(1m)

RATED CURRENT: 0.7A(1m)

MIN. BEND DIAMETER: 60mm


WARRANTY: 5 years

INGRESS PROTECTION: IP20 or IP67.

APPLICATION: Suitable for indoor or outdoor use.

OPERATING TEMPERATURE: (Ta) - 20° C to +40° C.

NOTE : Provision must be made for Control gear as it is remotely mounted. Ceiling details need to be supplied to design for the layout.

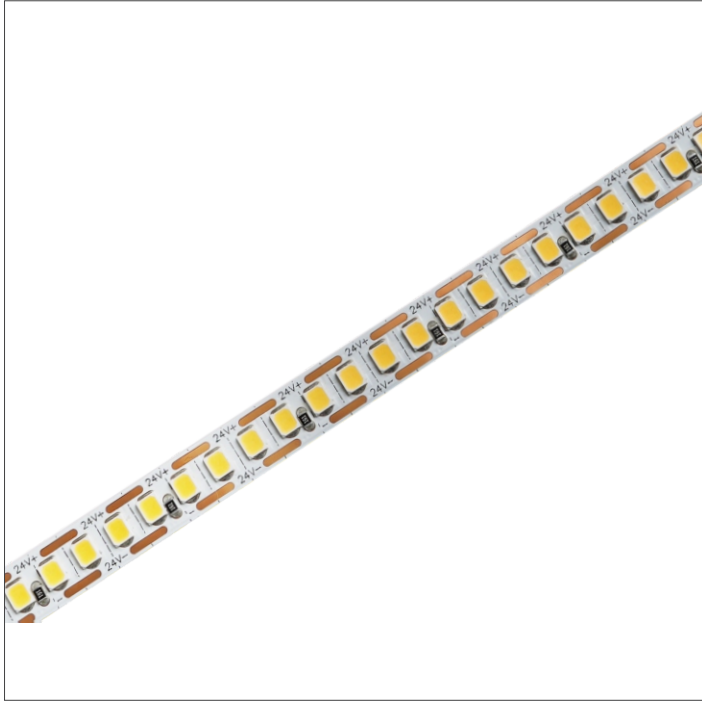

TECHNICAL SPECIFICATION

ITEM	POWER/m (W/m)	NOMINAL FLUX (lm/m)	EFFICACY (lm/W)	LED COLOUR (K)	CRI	IP RATING	CUT LENGTH (mm)	MAX CONNECTED (m)
24V-8mm	4.8W/m	653 lm/m	136 lm/m	3000K	90	IP20 IP67	5mm	8m
	4.8W/m	668 lm/m	139 lm/W	4000K	90	IP20 IP67	5mm	8m
	9.6W/m	1306 lm/m	136 lm/W	3000K	90	IP20 IP67	5mm	8m
	9.6W/m	1335 lm/W	139 lm/W	4000K	90	IP20 IP67	5mm	8m

ACCESSORIES

- Linear Strip 8mm Solderless Connector Wire to Board
- Linear Strip 8mm Solderless Connector Board to Board
- Linear Strip 8mm L-Connector Board to Board
- Linear Strip 8mm End Cap
- Linear Strip 8mm Solderless 2 PIN Connector 200mm wire
- Linear Strip 8mm Silicone Connector