

LINEAR TRACK

MODEL NUMBER

LINEAR TRACK

SPECIFICATIONS

HOUSING : Extruded aluminium .

LIGHT SOURCE : The fitting is designed to operate a LED up to 50.3W.

DIFFUSER : PMMA Matt Opal Profile + Hi Mt. LT67 transmission diffuser.

FINISH : Powder coated.

MOUNTING : Track mounted.

LUMEN MAINTENANCE : 50000h (L90B10).

CCT : 4000K or 3000K .

CRI : 80.

CONTROL GEAR : The electronic power supply is suitable for operation with a 220 - 240 volts. 50 hertz single phase. Dimmable options available.

APPLICATION : Suitable for indoor use only.

OPERATING TEMPERATURE : (Ta) - 20° C to +25° C.




LIGHT SOURCE

LED - ZHAGA BOARD | CRI80 | 4000 Kelvin


LED CURRENT (mA)	700mA		900mA	
Length	SYSTEM WATTAGE (W)	NOMINAL FLUX (lm)	SYSTEM WATTAGE (W)	NOMINAL FLUX (lm)
292mm (300mm)	9W	1575 lm	12W	1986 lm
572mm (600mm)	20W	3177 lm	24W	3994 lm
853mm (900mm)	27W	4467 lm	34W	5621 lm
1133mm (1200mm)	35W	6311 lm	43W	7746 lm
1414mm (1500mm)	41W	8162 lm	55W	10140 lm

DIMENSIONS IN MM

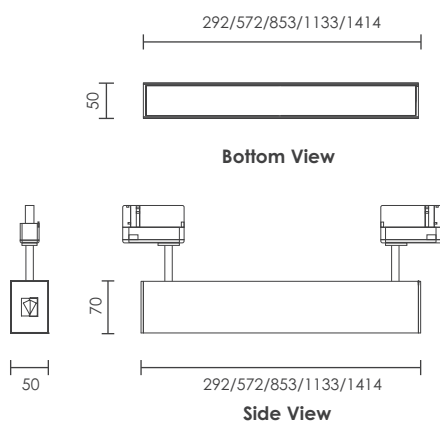

APPLICATION AREAS

Indoor application.
Commercial developments.
Retail developments.
Shopping malls.
Public buildings.



COLOURS




Black (B)



White (W)

LIGHT DISTRIBUTION

1200mm 30.8W LED



cd/klm
— C0 - C180 — C90 - C270

