


NANO ZIGZAG

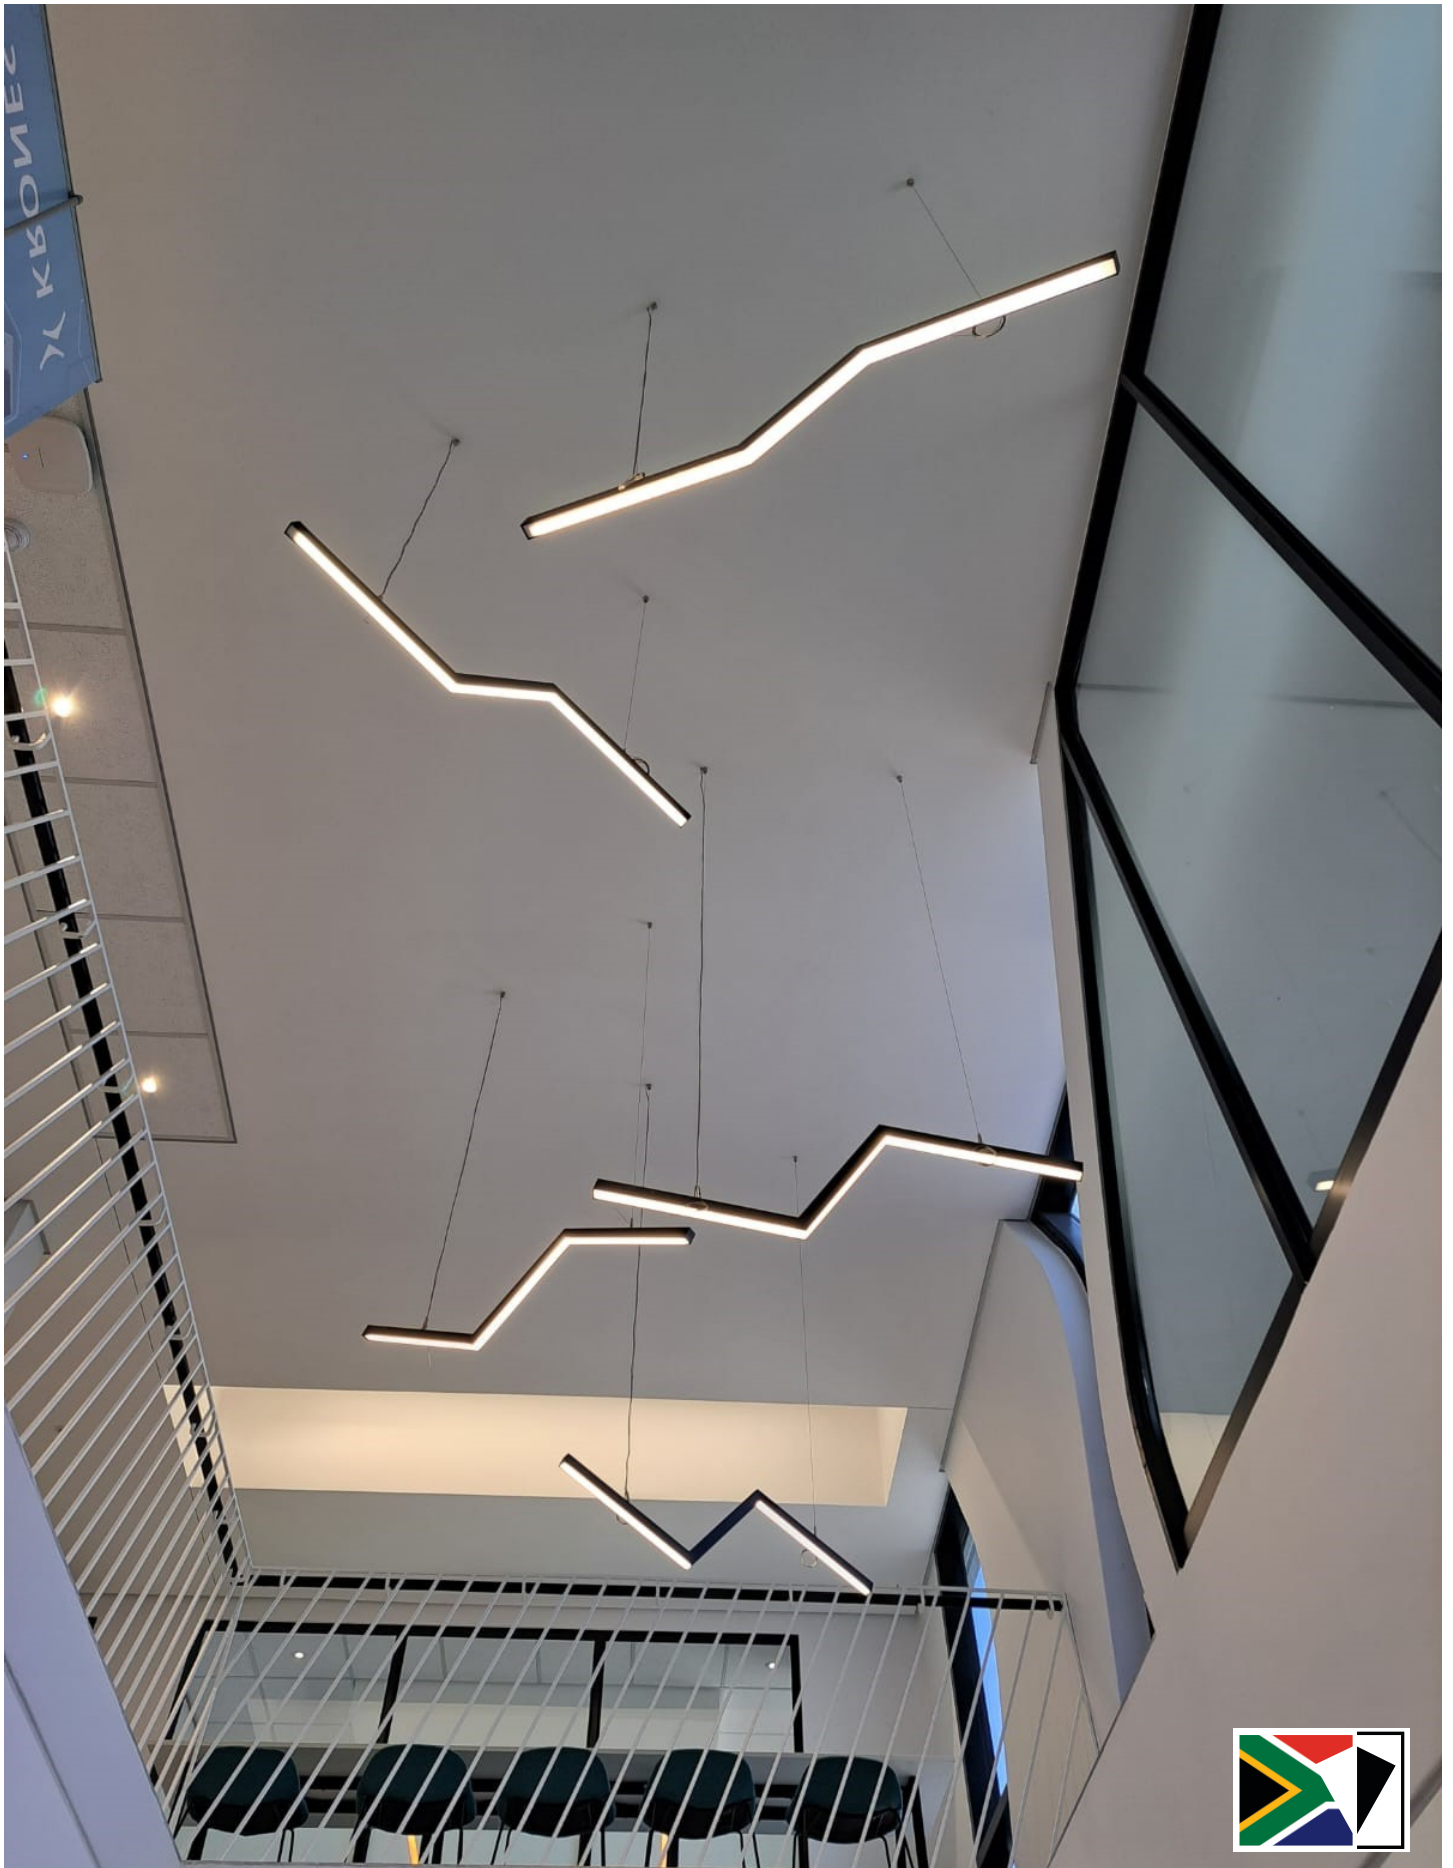

NANO ZIGZAG

MODEL NUMBER

NANO ZIGZAG 950

NANO ZIGZAG 1200

NANO ZIGZAG 1500

SPECIFICATIONS

HOUSING : Extruded aluminium .

LIGHT SOURCE : The fitting is designed to operate a LED up to 22W/m.

DIFFUSER : PMMA Matt Opal Profile.

FINISH : Powder coated.

MOUNTING : Suspended. Hanging detail : stainless steel wire and cabtyre. Adjustable swivel clutch wire suspension which allows for adjustment.

ACCESSORIES : Ceiling Cup.

CONTROL GEAR : Remote power supply. The electronic power supply is suitable for operation with a 220 - 240 volts. 50 hertz single phase.



APPLICATION : Suitable for indoor use only.

OPERATING TEMPERATURE : (Ta) - 20° C to +25° C.

FEATURES : Zigzags in various sizes with slender LED lines of light are the essence of this fitting.

Installation instructions available on request or on the website.

NOTE : Provision must be made for Control gear as it is remotely mounted.

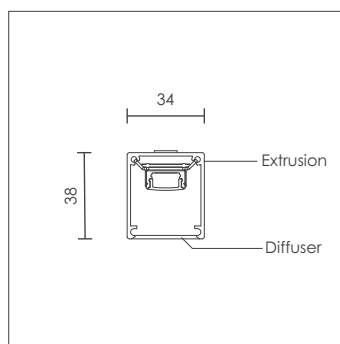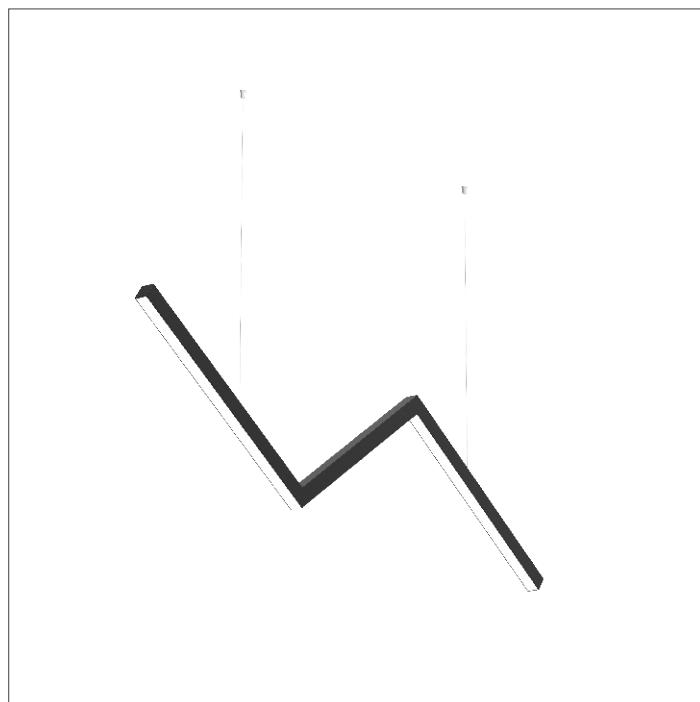

Section View Profile

COLOURS



Black (B)



Matt Silver (M)




White (W)



Charcoal Grey (C)

APPLICATION AREAS

Indoor application.
 Shopping centres
 Office receptions.
 Conference centres



LIGHT SOURCE

LED BOARD 24V

BOARDS	VOLTS (V)	POWER/m (W/m)	NOMINAL FLUX (lm/m)	EFFICACY (lm/W)	LED COLOUR (K)	CRI	LED SPACING (mm)	CUT LENGTH (mm)	MAX CONNECTED (m)
AVAILABLE ON REQUEST	24V	15W/m	2212 lm/m	147.5 lm/W	3000K/4000K/6000K	80	14mm	99mm	9m
STANDARD	24V	22W/m	2950 lm/m	134.09 lm/W	3000K/4000K/6000K	80	14mm	99mm	6m

DIMENSIONS MM

