

PLATO

MODEL NUMBER

PLATO

SPECIFICATIONS

HOUSING : LM 6 die cast aluminium and extruded aluminium.

LIGHT SOURCE : The fitting is designed to operate a 12W LED.

FINISH : Powder coated.

MOUNTING : Plinth mounted - chemical anchor or bolt cage.

CONTROL GEAR : 220V - Direct to mains.

FASTENERS : All external screws are stainless steel.

GASKET : Silicone sponge gasket.

INGRESS PROTECTION : IP65.

OPERATING TEMPERATURE : $(T_a) \leq 35^\circ \text{C}$.

WEIGHT : 5 Kg.

WINDAGE : Max. projected areas for mounting 0.138m².

FEATURES : Surge arrester to protect LED supply.




LIGHT SOURCE

LED


VOLTAGE (V)	SYSTEM WATTAGE (W)	COLOUR TEMP (K)	NOMINAL FLUX (lm)
220V	12W	4000K	1556 lm
		3000K	1447 lm

APPLICATION AREAS

Indoor and outdoor application.
Parks and gardens.
Pedestrian walkways.
Building Entrances.



DIMENSIONS IN MM

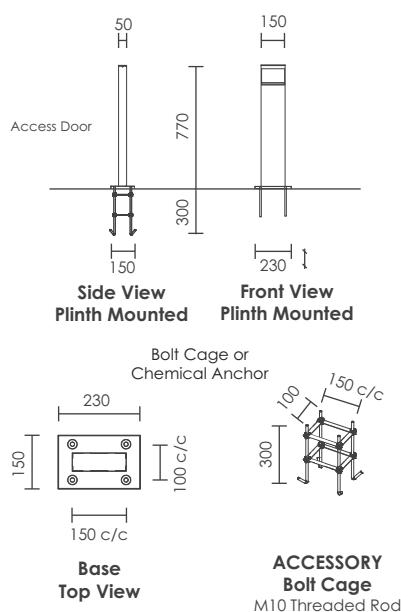

COLOURS

	Black (B)		Matt Silver (M)
	White (W)		Charcoal Grey (C)

LIGHT DISTRIBUTION

LED 12W

