

360° HF RECESSED PRESENCE SENSOR

MODEL NUMBER

STLM004S - On/Off
STLM004D - DALI 2 Broadcast
STLM004D2 - DALI 2

SUMMARY

STLM004 is a recessed mount, 360° high frequency presence sensor with a detection area of 12m and a maximum mounting height of 3.5m. Ideal for minor motion and front of house areas.


TECHNICAL DATA

PRODUCT CODE	STLM004S	STLM004D	STLM004D2
Supply Voltage	230V/50 Hz		Powered via DALI bus
Control Method	On/Off	DALI 2 Broadcast	DALI 2
Output	2000W / 10A LED - 500W	Up to 24 fittings	As per DALI software
Delay Time	30s - 30min		
Lux Control	10 - 1000 lux		
Setting Via	Rotary dial / IR Remote		DALI software
Features	Standard motion & Lux switching	corTECH Manual override Daylight harvesting	Software dependant


WARRANTY - 5 years

DIMENSIONS IN MM

HOLE CUT OUT

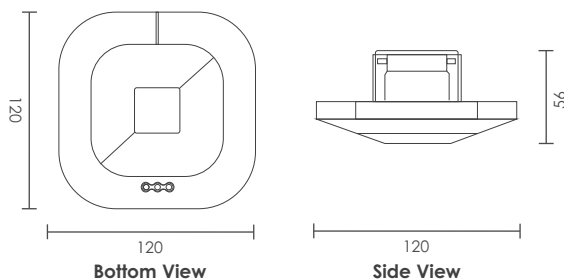

DETECTION AREA

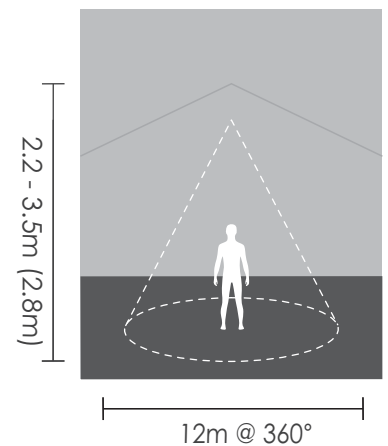


APPLICATION AREAS

- Medium - Large offices
- Open plan offices
- Reception areas
- Meeting/Boardrooms
- Conference rooms
- Lobbies
- Changing rooms
- Pause areas
- Libraries
- Laboratories


360° HF RECESSED PRESENCE SENSOR

WIRING DIAGRAMS


STLM004S ON/OFF WIRING

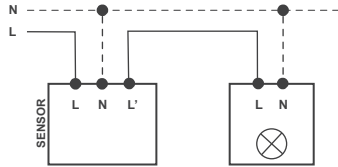

STLM004D MASTER WIRING

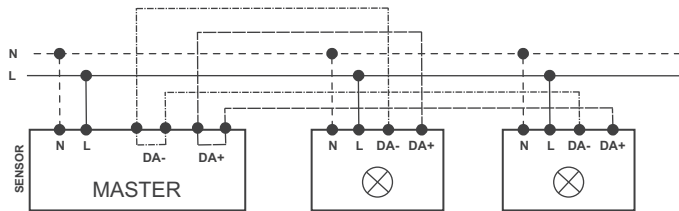

MASTER-SLAVE WIRING

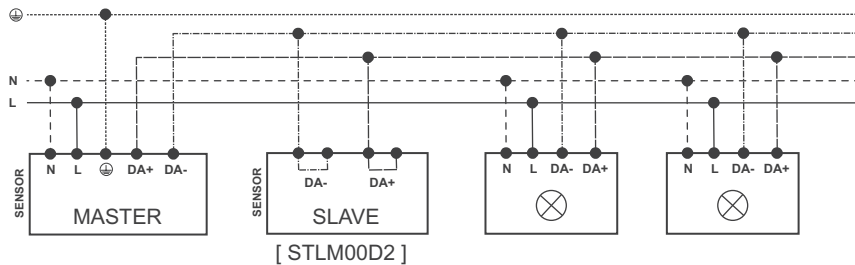

STLM004D2 DALI-2 WIRING

