



Save These Instructions for Future Reference



Sage

ALL CONNECTIONS TO BE CARRIED OUT BY A QUALIFIED ELECTRICIAN
PLEASE READ CAREFULLY BEFORE STARTING INSTALLATION.



⚠ WARNING

Electronic Control Device

**ELECTRIC SHOCK
HAZARD**
This equipment is to be
serviced by trained
personnel only.

Sage

Save These Instructions for Future Reference

Electrical products can cause death, injury, or damage to property. Installation of this product must be carried out by a qualified electrician, in compliance with SANS 10142 or corresponding regulations of the country of installation.

On completion of installation, the Certificate of Compliance must be updated.

For non user replaceable light source: The light source contained in this luminaire shall only be replaced by the manufacturer or his/her service agent or a similar qualified person

WARNING: TO AVOID FIRE, SHOCK OR DEATH

TURN OFF POWER AT CIRCUIT BREAKER OR FUSE AND TEST THAT THE POWER IS OFF BEFORE WIRING

ALL LUMINAIRES SUPPLIED AND TO BE INSTALLED ABOVE AND BELOW 5 METERS ARE IN COMPLIANCE WITH SANS 60598 SECTION 3.5.6 ACCORDING TO THE MANUFACTURER GUARANTEE AND WARRANTY

Regent Lighting reserves the right to change specifications modify designs and discontinue items without incurring obligation and whilst every effort is made to ensure that descriptions, specifications and other information in this catalogue are correct, no warranty is given in respect thereof and the company shall not be liable for any error therein.

www.regentlight.co.za

REGENT LIGHTING A DIVISION
OF WAHL INDUSTRIES.

3 - 13 MAIN REEF SERVICE ROAD, CORNER
SPRINGBOK AND MAIN REEF ROAD, INDUSTRIAL,
JOHANNESBURG. SOUTH AFRICA.
TEL : +27 11 474 0171

April 2021

INSTALLATION INSTRUCTIONS

PLEASE READ CAREFULLY BEFORE STARTING INSTALLATION.
ALL CONNECTIONS TO BE CARRIED OUT BY A QUALIFIED ELECTRICIAN




⚠ WARNING

Electronic Control Device

**ELECTRIC SHOCK
HAZARD**
This equipment is to be
serviced by trained
personnel only.

DO NOT CONNECT THE FITTING LIVE

1

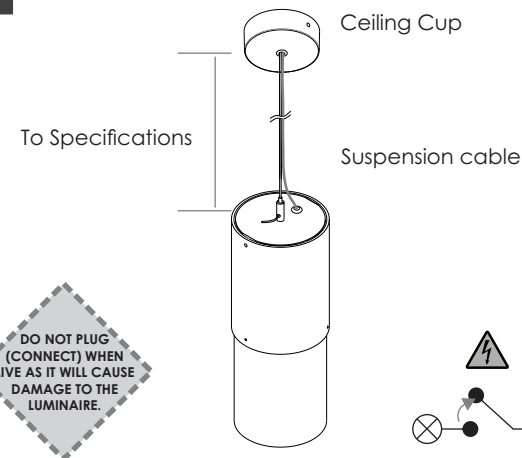


Requirements:

- **Be sure the electricity to the system you are working on is isolated.**
- **If the main supply power (live) is on, it will cause damage to the luminaire.**

1. Fitting as supplied in Regent Lighting Solutions box.

2

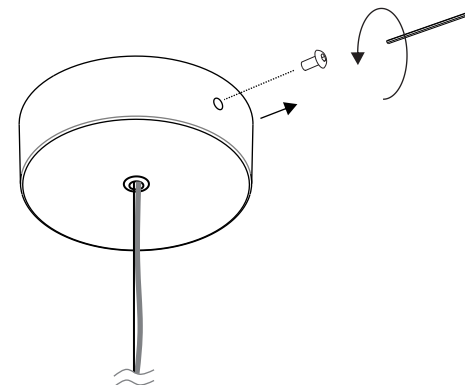

2. Release the ceiling cup by unscrewing the x2 Allen socket button screws on the sides .

2.1. Feed the lead cable from the fitting through the suspension pole and connect it to the driver.

2.2. Connect the fitting power lead to the driver




Important Safety Instructions

- This product should be installed by a competent person i.e. Qualified electrician.
- This product requires a constant stable electrical supply 220V - 240V VAC 50Hz - alternating current.
- The product must be regularly maintained, including the replacement of lamps/LED timeously.
- This product could be HAZARDOUS if not used correctly, it could cause electric shock, serious bodily harm or death.
- This product is not a toy, please keep away from children.
- This product may contain small parts that can be swallowed.



- Use only the correct light bulbs/LED as stipulated on the carton for the product.
- Any modifications of this product after supply will result in the guarantee being void.
- Spare parts may become unavailable over time. Items can vary slightly from the picture on the carton
- Coastal humidity can affect the longevity of the light fitting over time.
- Be sure to follow the steps in the order given.
- Read instructions carefully.


3

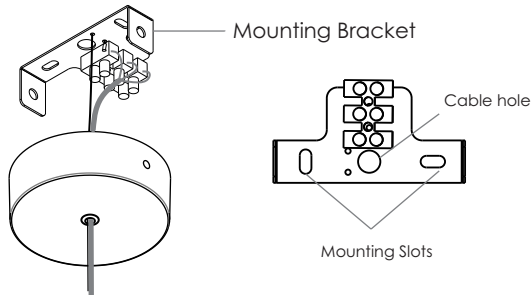

3. Ensure power supply passes through center hole on the mounting bracket


Remove the mounting bracket from the ceiling cup and use the two slots to mark mounting points on the ceiling.

4

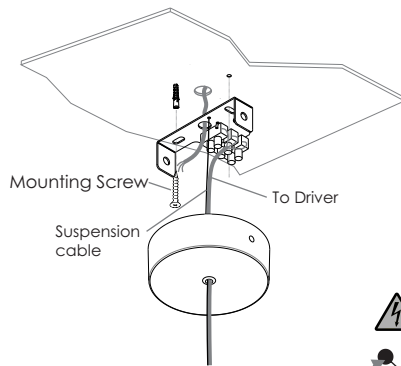


4. Screw the mounting screws through the slots to the ceiling. Fasten the Mounting bracket to the ceiling.

Connect the Switched Active (S/A), Neutral (N) and Earth (E) cable(s) to the terminal block.

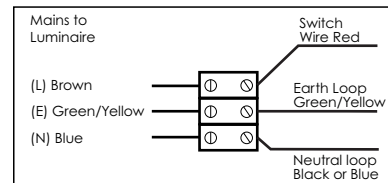


5

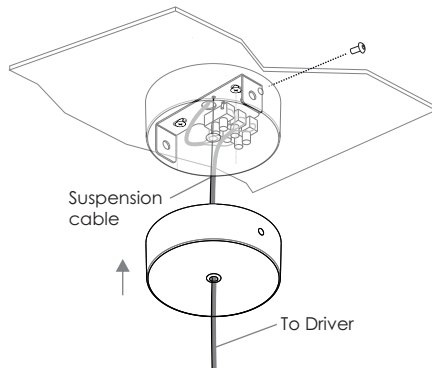

4. Push the ceiling cup to the mounting bracket. Ensure to line up the screw holes on the cup to those of the bracket.


Ensure that there are no exposed conductors, loose strands or trapped insulation

6

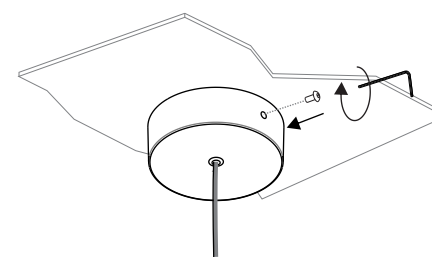

6. Use provided x2 Allen socket button screws to fasten the ceiling cup to the mounting bracket.


7

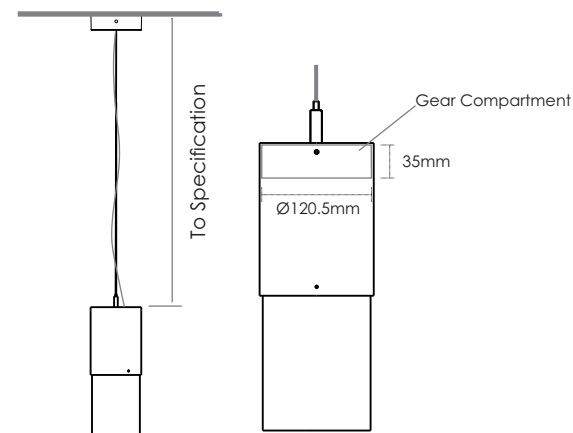

7. Suspend fitting as specified suspension height.

Ensure ceiling cup is secure.

8

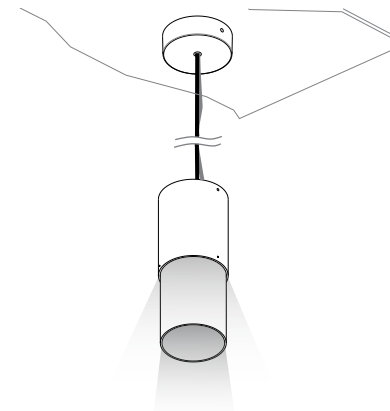

8. Switch On power supply.

