

SAGE

MODEL NUMBER

SAGE

SPECIFICATIONS

HOUSING : Extruded aluminium.

HEAT SINK : Aluminium extrusion.

LIGHT SOURCE : The fitting is designed to operate a LED up to 38W.

REFLECTOR : Beam degree 60°.

DIFFUSER : 120mm Ø Acrylic diffuser.

FINISH : Powder coated.

MOUNTING : Suspended.

ACCESSORIES : Decorative ceiling cup.

Ceiling cup 100 with suspension cable only.

COLOUR CONSISTENCY : Mac Adams 2SDCM.

LUMEN MAINTENANCE : 90000h (L90B10) @ 65° C.

CCT : 4000K, 3500K or 3000K .

CRI : 90.

DIMENSIONS : 127mm Ø x 139mm .

APPLICATION : Suitable for indoor use only.

OPERATING TEMPERATURE : (Ta) - 20° C to +30° C.




LIGHT SOURCE

LED COB 14.5mm

LED CURRENT (mA)	LUMINAIRE WATTAGE (W)	NOMINAL WATTAGE (W)	COLOUR TEMP (K)	NOMINAL FLUX (lm)
500mA	20W	17W	4000K 3500K 3000K	2862 - 3158 lm
700mA	27W	24W		3867 - 4286 lm
900mA	35W	33W		4744 - 5315 lm
1050mA	42W	38W		5461 - 6006 lm

APPLICATION AREAS


Indoor application.
Exclusive retail shops
Supermarkets.
Hotels.
Exhibition halls.
Studios.



COLOURS

	Black (B)		Gold (G)
	White (W)		

DIMENSIONS IN MM

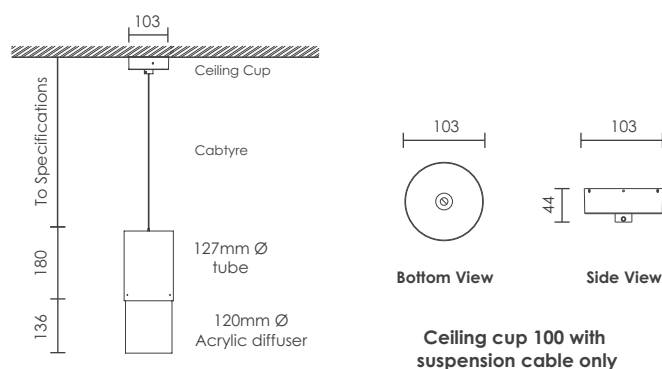

LIGHT DISTRIBUTION

LED 42W

