SKY





sensTECH daliTECH corTECH

MODEL NUMBER

SKY 350mm
SKY 600mm
SKY 950mm


SPECIFICATIONS

HOUSING : Aluminium.
LIGHT SOURCE : The fitting is designed to operate a LED up to 110W.
DIFFUSER : Polycarbonate.
FINISH : Powder coated.
MOUNTING : Surface mounted.
CCT : 4000K
CRI : >80
CONTROL GEAR : The electronic power supply is suitable for operation with a 220 - 240 volts. 50 hertz single phase.
APPLICATION : Suitable for indoor use only.
OPERATING TEMPERATURE : (Ta) - 20° C to +30 ° C.
Dimmable on request.

N.B. Ceiling details must be specified when ordering to ensure that correct mounting can be supplied.

APPLICATION AREAS

Indoor application.
Symmetrical light distribution.
Shopping Centres
Office Receptions.
Conference Centres



COLOURS

Black (B)
White (W)
Gold (G)

IP 20


LIGHT SOURCE

LED

SIZE	SYSTEM WATTAGE (W)	COLOUR TEMP (K)	LUMINOUS FLUX (lm)
350mm	18W	4000K	663 lm
600mm	45W		2960 lm
950mm	110W		9016 lm

The environmental conditions of the installation will impact the efficiency of the LED's.
Due to the continual advancement in LED technology the type of LED is subject to change.

DIMENSIONS IN MM

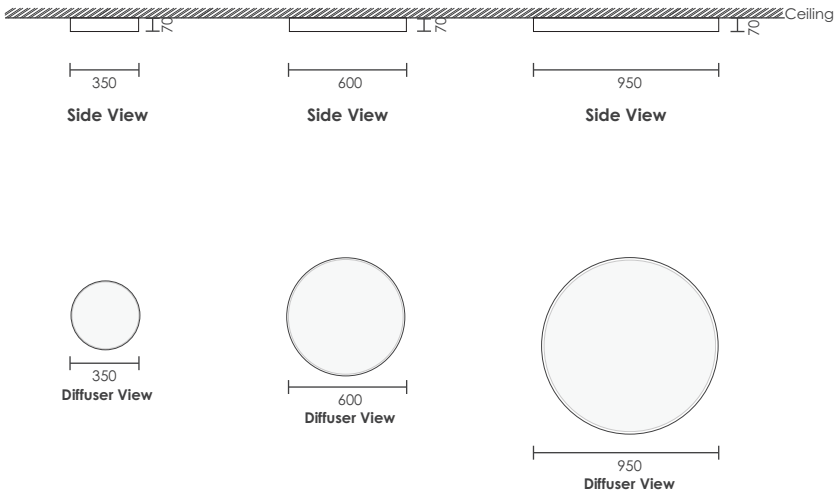

LIGHT DISTIBUTION

