STRATA FLEX



STRATA FLEX

MODEL NUMBER


STRATA FLEX


SPECIFICATIONS

LIGHT SOURCE : The fitting is designed to operate a LED up to 10.6W/m. High luminous efficiency LED lamp beads.
DIFFUSER : Three-color silicone extrusion
BEAM ANGLE : 114.2°
BENDING : Side Bending.
COLOURS AVAILABLE : 3000K or 4000K. RGBW - 4000K.
MOUNTING : Suspended. Stainless steel wire or rods.
INPUT WATTAGE : 24V DC (Constant Voltage)
LUMEN MAINTENANCE : 70% 60 000 hours.
CRI (white) : >90Ra
INGRESS PROTECTION : IP67.
APPLICATION : Suitable exterior use.
OPERATING TEMPERATURE (Ta) - 25° C to +55 ° C.
WARRANTY : White 5 year warranty.
FEATURES : Ideal for horizontal curved applications.
Max lengths - 10m powered from one end.
20m powered from both ends.
Minimum bend radius - 60mm

NOTE : Provision must be made for Control gear as it is remotely mounted. Installation details need to be supplied to design for the layout.



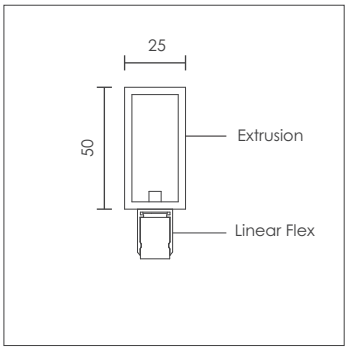

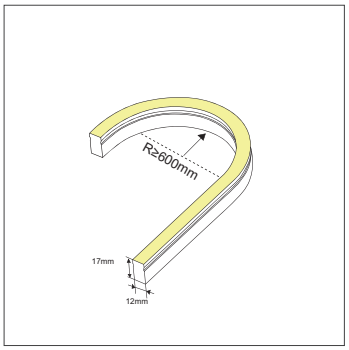

APPLICATION AREAS


Outdoor application.


LIGHT SOURCE

MODEL	CCT	CRI	VOLTAGE (V)	RATED CURRENT (A/m)	RATED POWER (W/m)	MAX POWER (W/m)	LUMINOUS FLUX (lm/m)	STANDARD LENGTH	No. LED's	MAX CONNECTED (m)
Standard	3000K or 4000K	>90	24V	0.4	9.6	10.6	450 - 420	5m & 10m	7 LED/50mm	10m SINGLE POWER FEED
RGBW	R 615-625nm G 520-530nm B 465-470nm	-		0.6	14.4	16		5m	12 LED/62.5mm	

LIGHT DISTIBUTION

LED

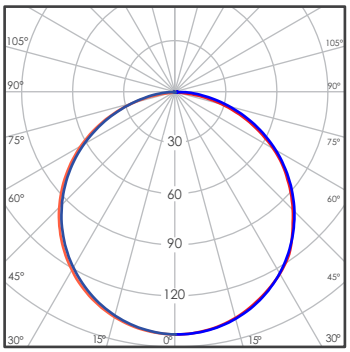


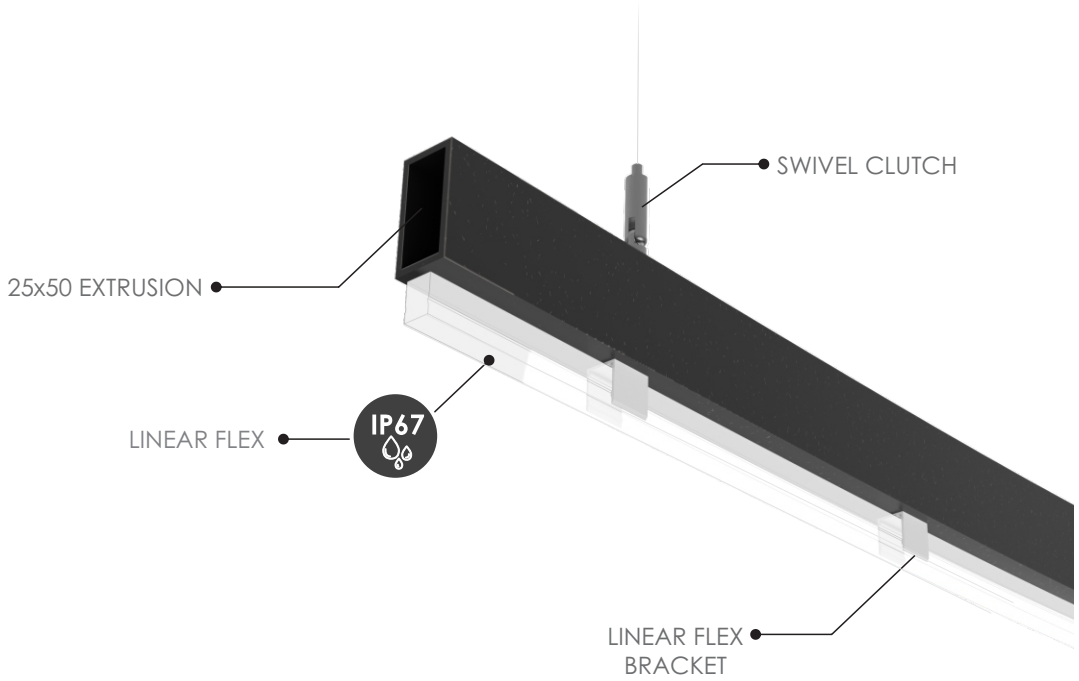


DESIGN OPTIONS

Various design options available

MINIMUM R600*

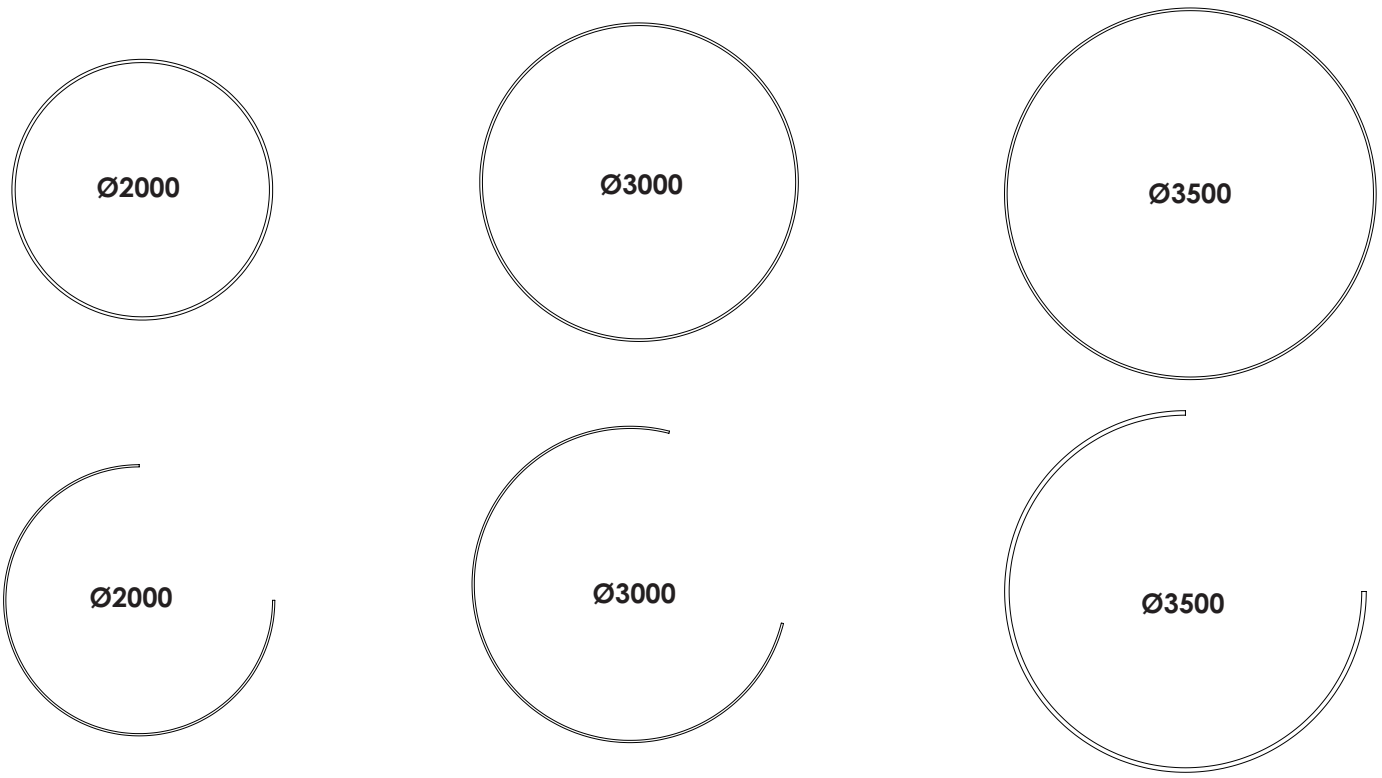

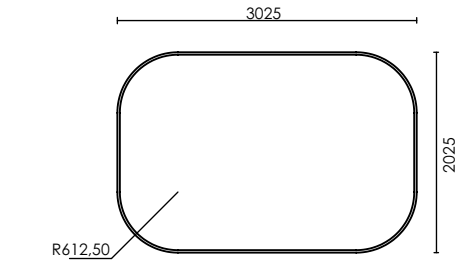



MINIMUM R600*

