

SUDO PRO

MODEL NUMBER

SUDO PRO

SPECIFICATIONS

HOUSING : LM6 die cast and extruded aluminium.

DIFFUSER : Opal diffuser.

LIGHT SOURCE : The fitting is designed to operate a GU10 or a LED up to 13W.

FINISH : Powder coated.

MOUNTING : Suspended.

ACCESSORIES : Decorative ceiling cup and rod or stainless steel wire and cable tie.

DIMENSIONS : 100mm Ø x 377mm.

APPLICATION : Suitable for indoor use only.

OPERATING TEMPERATURE : (Ta) - 20° C to +25° C.

WEIGHT : 0.6 Kg.

Fitting supplied with internal power supply.

DALI compatible on request.

N.B. Ceiling details must be specified when ordering to ensure that correct mounting can be supplied.




COLOURS

	Black (B)		Matt Silver (M)
	White (W)		Charcoal Grey (C)
	Gold (G)		

APPLICATION AREAS

Indoor application.
Symmetrical distribution.
Commercial Developments.
Retail Developments.
Shopping malls.



LIGHT SOURCE

LED COB 9mm


LED CURRENT (mA)	SYSTEM WATTAGE (W)	COLOUR TEMP (K)	LUMINOUS FLUX (lm)
200mA	7.5W	4000K 3000K	860 - 1110 lm
350mA	13W	4000K 3000K	1415 - 1830 lm

LED

Lamp	Wattage	Base
LED	Wattage as per lamp manufacturer (Maximum 60mm length)	GU10




DIMENSIONS IN MM

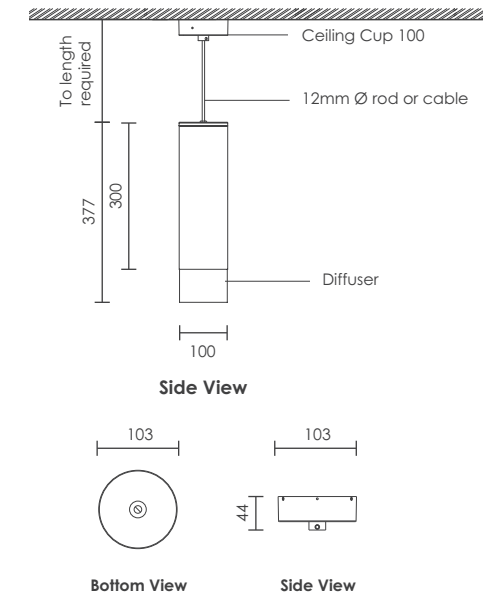

Ceiling Cup 100
Ceiling cup 100 with suspension tube and cable
Ceiling cup 100 with suspension cable only

LIGHT DISTRIBUTION

LED 13W 40° Beam

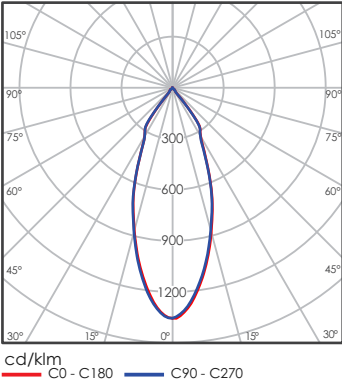

LED 4W 35° Beam

