KUHLE SPIKE

MODEL NUMBER

KUHLE SPIKE

SPECIFICATIONS

HOUSING : LM 6 die cast and extruded aluminium.
LIGHT SOURCE : The fitting is designed to operate a range of LED's up to 20W.
LUMEN MAINTENANCE : L90B10 > 110 000 @ 25° Ta.
DIFFUSER : Toughened glass or high impact acrylic.
FINISH : Powder coated.
MOUNTING : Spike mounted.
ACCESSORIES : Wire Guard.
SURGE ARRESTER : Incorporates an electronic trip connector protector with surge protection 6 KV. Additional removable inline surge arrester 10 KV.
FASTENERS : All external screws are stainless steel. Cable glands are SABS approved to insulate IP67 ingress protection.
GASKET : Gaskets are manufactured from post cured silicone rubber material.
INGRESS PROTECTION : IP 65.
OPERATING TEMPERATURE : (Ta) ≤ 35° C.
WEIGHT : 3Kg.
WINDAGE : Max. Projected areas for mounting - 0.05m²



COLOURS

- Black (B)
- White (W)
- Matt Silver (M)
- Charcoal Grey (C)

APPLICATION AREAS

Landscape lighting
Facade lighting
Sign boards



IP 65


LIGHT SOURCE

LED


LED CURRENT (mA)	COLOUR TEMP (K)	NOMINAL WATTAGE (W)	SYSTEM WATTAGE (W)	NOMINAL FLUX (lm)	SYSTEM FLUX (lm)
350mA	4000K	13W	14W	2542 lm	1891 lm
500mA		19W	20W	3632 lm	2708 lm

LIGHT DISTIBUTION


RLS086T4S

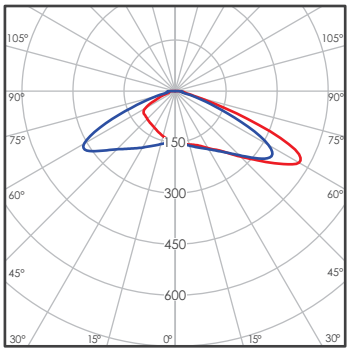


RLS959T3M

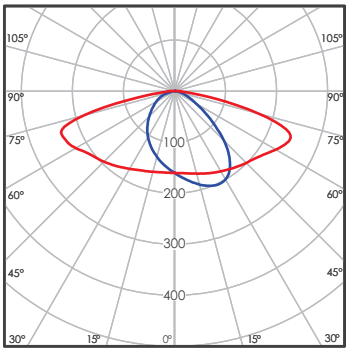


90°

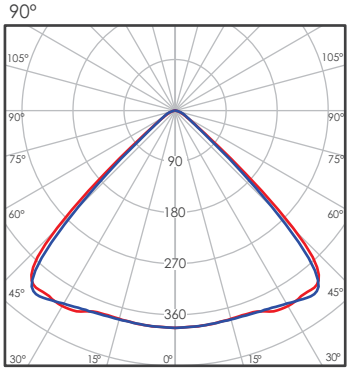

DIMENSIONS IN MM

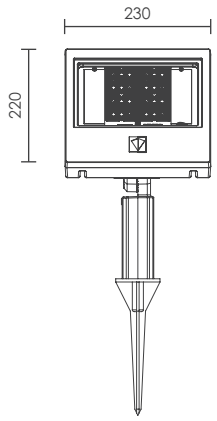


KUHLE SPIKE
Front View

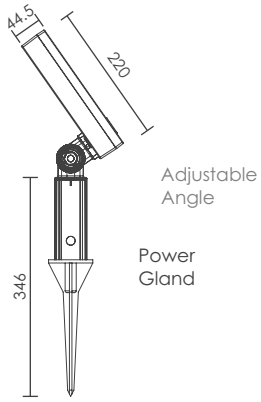


KUHLE SPIKE
Side View

ACCESSORIES

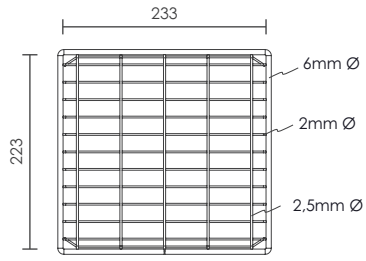

Wire Guard Front View



Wire Guard Side View

