

PEGASUS

MODEL NUMBER

PEGASUS

SPECIFICATIONS

- HOUSING :** LM 6 die cast aluminium and extruded aluminium.
- LIGHT SOURCE :** The fitting is designed to operate a range of Compact Fluorescent lamps up to 42W and LED up to 30W.
- DIFFUSER :** UV stabilised clear acrylic.
- FINISH :** Powder coated or paint technique.
- MOUNTING :** Plinth mounted or buried.
- ACCESSORIES :** Must be specified when ordering.
Available accessories - Access door, MCB and bolt cage.
- CONTROL GEAR :** Electronic or magnetic control gear. The electronic supply is suitable for operation with 220 – 240 volts - 50 hertz single phase.
- FASTENERS :** All external screws are stainless steel.
- GASKET :** Silicone sponge gasket.
- INGRESS PROTECTION :** IP54.
- MECHANICS :** Operating Temperature (T_a) ≤ 35° C.
Weight : 7 Kg.
Windage : Max. projected areas for mounting 0.1215m².
- FEATURES :** Surge arrester to protect LED supply.

LIGHT SOURCE


LED Osram Duris E5

LED CURRENT (mA)	NOMINAL WATTAGE (W)	COLOUR TEMP (K)	NOMINAL FLUX (lm)
700mA	30W	4000K	3811 lm
		3000K	3544 lm

Conventional Light Source

LAMP	WATTAGE	BASE
LED	Lamp specification	ES
CFL	13W, 18W, 26W or 42W	G24

DIMENSIONS IN MM

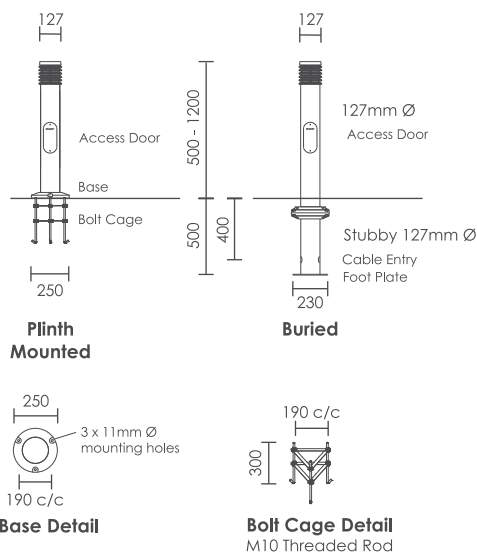

APPLICATION AREAS

Indoor and outdoor application.
Symmetrical distribution.
Parks and gardens.
Pedestrian walkways.
Building entrances.
Parking areas.



COLOURS

- Black (BL)
- Antique Green (AG)
- White (WH)
- Antique Gold (AD)
- Moss Green (MG)
- Antique Silver (AS)
- Antique Copper (AC)

LIGHT DISTRIBUTION

26W CFL @ 1200mm

