

TUBO 6

MODEL NUMBER

TUBO 6 DOUBLE
TUBO 6 SINGLE

SPECIFICATIONS

- HOUSING :** LM 6 die cast and extruded aluminium.
- LIGHT SOURCE :** The fitting is designed to operate a GU10 lamp.
- DIFFUSER :** Clear tempered glass.
- FINISH :** Powder coated.
- MOUNTING :** Wall mounted. Single - up or down light.
Double - up and down light.
- ACCESSORIES :** Mounting plate to cover connector box.
- POWER SUPPLY :** Designed to operate a direct to mains 220 – 240 volts AC 50 Hertz single phase.
- FASTENERS :** All external screws are stainless steel.
- GASKET :** EPDM and insertion rubber gasket.
- INGRESS PROTECTION :** IP 55.
- OPERATING TEMPERATURE :** (T_a) ≤ 35° C.
- WEIGHT :** 1Kg including control gear.

NOTE : GU10 lamp must be suitable for enclosed application. Maximum lamp length is 60mm high.




LIGHT SOURCE

LED





LAMP	WATTAGE	BASE
LED	Wattage as per lamp manufacturer for enclosed application (Maximum 60mm length)	GU10

APPLICATION AREAS

Indoor or outdoor application.
Single or double light element.
Commercial Developments.
Retail Developments.
Shopping malls.
Public buildings.



DIMENSIONS IN MM

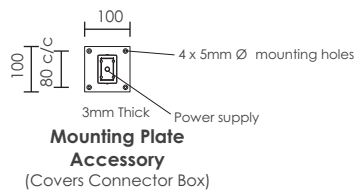


COLOURS

- Black (B)
- Matt Silver (M)
- White (W)
- Charcoal Grey (C)

LIGHT DISTRIBUTION

LED 4W 35° Beam (Verbatim)



cd/klm
— C0 - C180 — C90 - C270

