

# TUBO CEILING

## MODEL NUMBER

## TUBO CEILING

## SPECIFICATIONS

**HOUSING :** LM 6 die cast aluminium and extruded aluminium.

**LIGHT SOURCE :** The fitting is designed to operate a GU10 lamp.

**DIFFUSER :** Clear 4mm tempered glass.

**FINISH :** Powder coated.

**MOUNTING :** Ceiling mounted.

**POWER SUPPLY :** Designed to operate a direct to mains 220 – 240 volts AC 50 Hertz single phase.

**FASTENERS :** All external screws are stainless steel.

**GASKET :** EPDM gasket.

**INGRESS PROTECTION :** IP54.

**MECHANICS :** Operating Temperature ( $T_a$ )  $\leq 35^\circ\text{C}$ .

Weight : 1Kg including control gear.


**FEATURES :** Safety cable to ensure the fitting cannot fall.

**NOTE :** Maximum lamp length is 60mm high.



## APPLICATION AREAS

Indoor or outdoor application.  
 Symmetrical distribution.  
 Commercial Developments.  
 Retail Developments.  
 Shopping malls.  
 Public buildings.




## LIGHT SOURCE

### LED

LAMP	WATTAGE	BASE
LED	Wattage as per lamp manufacturer for enclosed application (Maximum 60mm length)	GU10

## DIMENSIONS IN MM

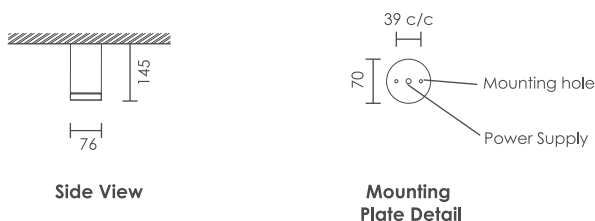

## COLOURS



## LIGHT DISTRIBUTION

LED 4W 35° Beam (Verbatim)

